



HIGH POWER AUTOTRANSFORMERS

DESIGNED AND MADE IN THE USA

OVER 40 YEARS AS THE INDUSTRY LEADER

- U.L. LISTED COMPONENTS
- FULLY RATED AT 50 OR 60 Hz

- CLEARLY MARKED ELECTRICAL RATINGS
- BLUE BAKED ENAMEL FINISH


HIGH POWER AUTOTRANSFORMER

220 - 240 VOLTS ↔ 110 - 120 VOLTS

500 → 6000 VA STEPDOWN/STEPUP
JUNCTION BOX FOR PERMANENT WIRING

IN STOCK

CATALOG NUMBER	MAX.VA (WATTS)	NOM.AMPS (SD / SU)	WEIGHT LBS.	DIMENSIONS		
				H	W	D
SD-11JB	500	4.4 / 2.2	9	4	4 1/2	5 7/8
SD-19JB	750	6.5 / 3.3	12 7/8	4	4 1/2	6 3/4
SD-13JB	1000	8.7 / 4.4	14 3/8	4	4 1/2	7 3/4
SD-14JB	1500	13.0 / 6.5	18 1/2	4	4 1/2	9
SD-20JB	2000	17.4 / 8.7	25	4 9/16	5 3/4	8 5/8
SD-39JB	2500	21.7 / 10.9	36 1/2	5 5/8	6 3/8	9 1/2
SD-28JB	3000	26.1 / 13.0	44 1/2	6 1/4	7	10
SD-29JB	4000	34.8 / 17.4	61	6 1/4	7	12
SD-22JB	5000	43.5 / 21.7	54	6 1/4	7	11
SD-30JB	6000	52.2 / 26.1	66	6 1/4	7	12 1/4

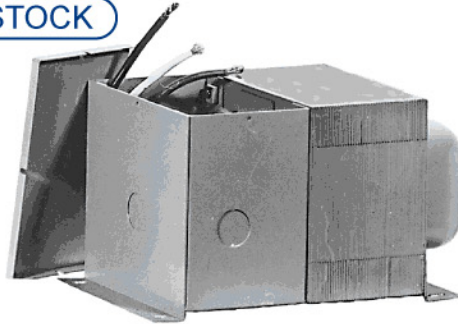

- LEAD WIRES FOR PERMANENT WIRING
- PROVIDES 115V TAP FOR 230V LINES
- CAN BE WIRED STEPDOWN (SD) OR STEPUP (SU)

TYPICAL APPLICATIONS: use on electric clothes dryers, electric ranges, or any large appliance to be permanently wired; convert voltage with a single transformer for a whole room, small houses, trailers, etc.

NOTE: WHEN USING A TRANSFORMER WITH MORE THAN ONE APPLIANCE AT A TIME, THE TOTAL WATTAGE OF ALL APPLIANCES USED TOGETHER SHOULD NOT EXCEED THE MAX.VA (WATTS) OF THAT TRANSFORMER.

QUALITY ENGINEERED

TODD SYSTEMS

INC.

PRECISION BUILT

FAX: (914) 963-3506

50 ASH STREET, YONKERS, NY, 10701 U.S.A.
www.toddsystems.com

(914) 963-3400